



SYS160

Fasson®
30% rPE80
White/S4905L/BG50#White
Imp

30% rPE80 White is a corona treated clear polyethylene film with medium gloss appearance, which contains 30% recycled material from post-consumer waste.

Applications



Key Features

- > White polyethylene film with medium gloss appearance containing 30% recycled material from post-consumer waste
- > Specially engineered adhesive for use on various fabric with APEO free
- >

Facestock

A corona treated white polyethylene film with medium gloss appearance, which contains 30% recycled material from post-consumer waste.

Basis Weight: 77 g/m² ± 10% ISO 536

Caliper: 0.077 mm ± 10% ISO 534

Adhesive

A general purpose permanent, acrylic emulsion adhesive. It does not contain APEO which is hazardous chemical commonly found in garment manufacturing process.

Liner

A super calendared white glassine paper with excellent roll label converting properties.

Basis Weight: 80 g/m² ± 10% ISO 536

Caliper: 0.070 mm ± 10% ISO 534

Performance data

loop Tack (st,st)-FTM 9: 11.0

20 min 90° Peel (st,st)-FTM 2: 6.0

24 hour 90° Peel (st,st)-FTM 2: 7.0

Minimum Application Temperature: -4°C

After labeling 24Hours, Service Temperature Range: -40°C~+90°C

Adhesive Performance

This is a clear, general purpose permanent adhesive with good initial tack and ultimate adhesion to a wide variety of substrates. Designed exclusively for industrial labeling applications.

S4905L is suitable for applications where compliance with FDA 175.105 is required. This section covers applications where for indirect or incidental contact food, cosmetic or drug products.

Applications and use

This product is supplied with an adhesive suitable for moderately, textured or over dyed cotton fabric apparel. There have been no cases known of fabric staining, distortion, or noticeable permanent mark when removed from fabric. However, we strongly recommend testing and scale-up trials on the actual garments intended to insure proper function. The above does not represent any guarantee or warranty and the Purchaser must independently determine the suitability of the products for the Purchaser's purposes.

Conversion/printing

The corona treated face material can be printed by letterpress, flexor, and silk screen, giving good print results with UV curing and water based inks. Cares should be taken with the heat during process.

To ensure optimum wettability and ink bond, additional in-line corona treatment is required. Ink testing is always recommended before production.

Sharp film tooling preferably in flat-bed, are important to ensure smooth conversion.

Acceptance of hot stamping foil is excellent.


Need avoid too much re-winding tension to causing bleeding.

Shelf life

One year when stored at 23 ± 2°C at 50 ± 5% RH.

SYS160

Fasson® 30% rPE80 White/S4905L/BG50#Whit e Imp

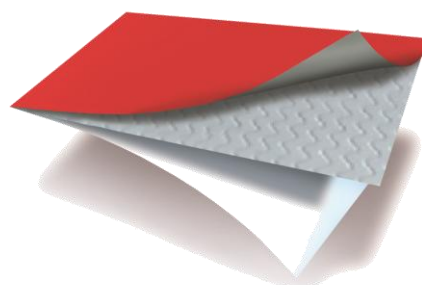

30% rPE80 White

S4905L

BG50#White Imp

Avery Dennison Label and Packaging Materials

32/F., Skyline Tower
39 Wang Kwong Road
Kowloon Bay, Kowloon,
Hong Kong
Tel: +852 2802-9618 | +856 400 828 3797

Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way