

表面基材

一种双向拉伸白色珠光效果聚丙烯膜，其表面有特殊适印涂层。

基本克重： 45 g/m² ± 10% ISO536

厚度： 0.060mm ± 10% ISO534

粘胶剂

一种通用型永久性丙烯酸乳胶。

底纸

经超级研光处理的白色格拉辛底纸，该底纸通过FSC认证(FSC Mix Credit, COC 证书号: SGS HK-COC-321257)。

基本克重： 60 g/m² ± 10% ISO536

厚度： 0.051mm ± 10% ISO534

典型粘性值(N/25mm)

初始粘性(st,st)- FTM 9: 10

20 分钟 90° 剥离粘性(st,st)- FTM 2: 5.5

24小时90°剥离粘性(st,st)- FTM 2: 7

最低贴标温度： 5°C

贴标后24H, 使用温度范围： -29°C ~ +93°C

粘胶剂表现性能

这是一种适用于各种温度的永久性丙烯酸粘胶剂,在诸多包装材料上均有优异表现性能。具有很好的模切与排废性能。

此粘胶剂符合 GB9685-2016《食品安全国家标准 食品接触材料及制品用添加剂使用标准》，可直接与所有食品类别(具体请参考 GB3160.1-2015)接触。

应用

典型应用日化及食品行业标签。印制后的无复膜的标签尽量避免接触酒精,异丙醇,汽油, 甲苯溶剂,从而造成图案褪色。

以上的建议应用说明不作为艾利·丹尼森的一种担保。所有艾利·丹尼森公司的产品的售出均应由客户在最终使用环境下进行测试,以确认是否符合该使用环境的要求。

印刷及加工

表面有特殊涂层,可用于凸版、柔性版、凹版及丝网等多种印刷方式。UV 油墨及水性油墨适用。应避免印至标签边缘,尤其是丝网 UV 油墨和 UV 上光油,高收缩性墨层会使标签卷曲,导致脱离型纸或在被贴物上起翘。

印刷前的油墨测试是必要的。

为了保证顺利地加工,推荐使用锋利的薄膜专用模切刀,尤其是在平压平的模切方式中。

烫金性能及效果优异。

应避免复卷张力过大,导致标签溢胶。

储存期

在温度 23±2°C、相对湿度 50±5%的情况下,可储存一年。


BW9903

Fasson®

60u 白色珠光膜

TC/S968F/60 白格拉辛 FSC

Mix Credit 背印

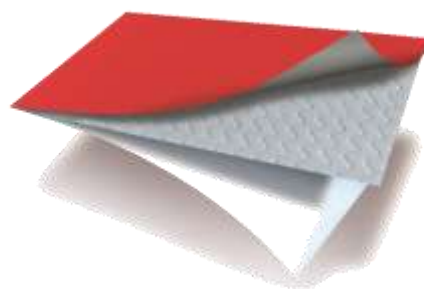

60u 白色珠光膜 TC

S968F

60 白格拉辛 FSC Mix
Credit 背印

Avery Dennison Label and Packaging Materials

32/F., Skyline Tower
39 Wang Kwong Road
Kowloon Bay, Kowloon,
Hong Kong
Tel: +852 2802-9618 | +856 400 828 3797

Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way