


## Digital Printing Portfolio

# Domino N610i UV Inkjet

Fasson® product constructions shown have been evaluated by Avery Dennison and Domino and are recommended based upon the existing printer ink system utilized at the time of testing. Additional product constructions are available. These products are available through our EXACT™ and Ready Width™ service programs. The one-slit roll minimum and next-day shipment are a great complement to the short run/quick turn capabilities of digital presses. Please contact your Avery Dennison sales representative for assistance.

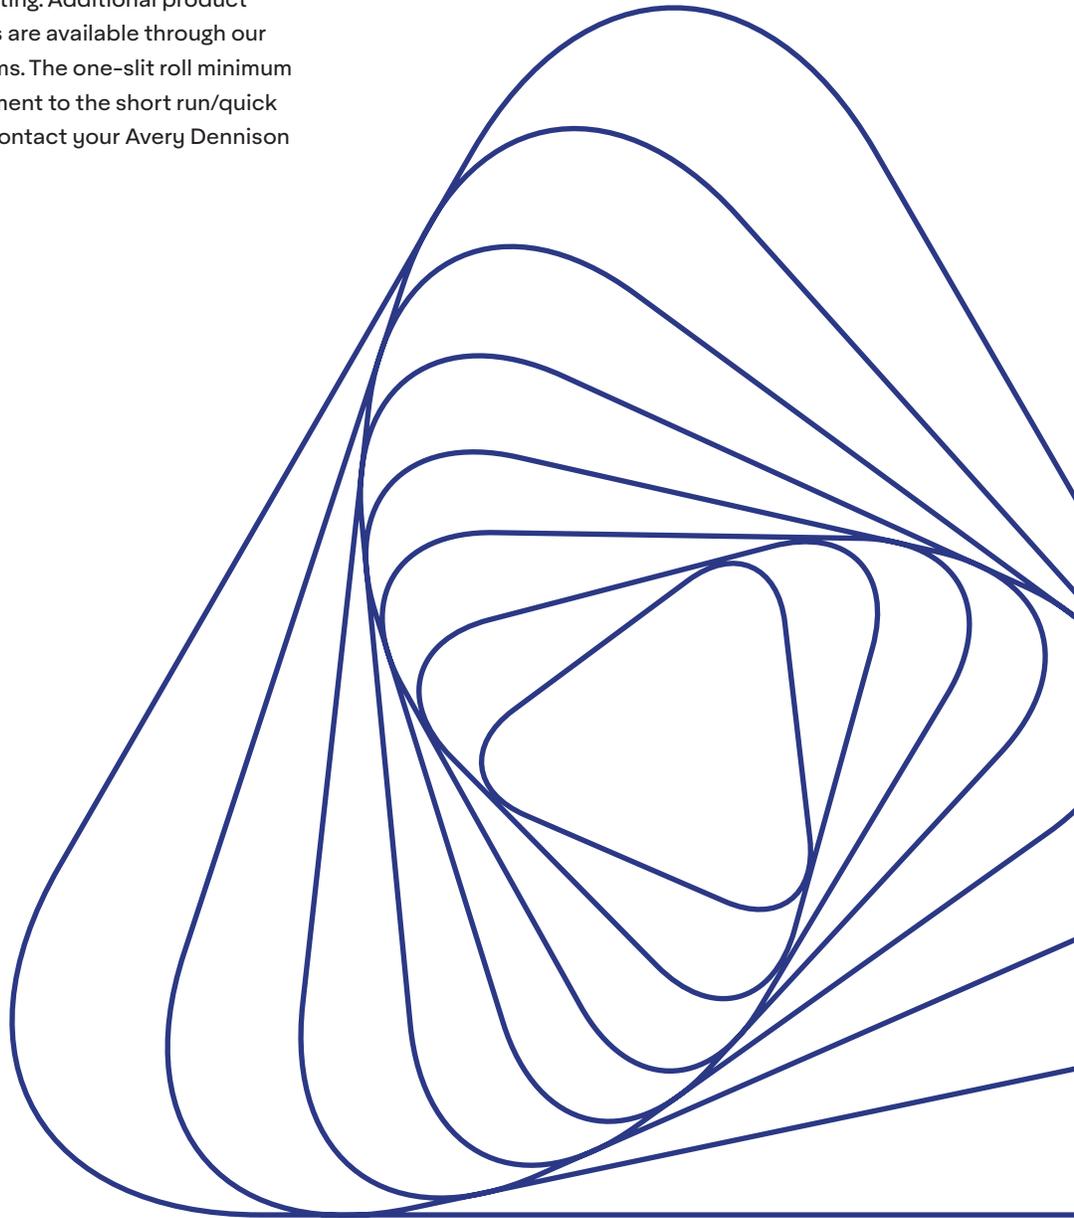

Spec#	Facestock	Adhesive	Liner	Width/Length (In/Ft.)	UV68 Ink	UV90 Ink
<b>Prime Paper</b>						
53664	55# Semi-Gloss UV Inkjet	AT20	40#SCK	EXACT™/5000	●	●
B4973	55# Semi-Gloss UV Inkjet	C4510	40#	Stock 78/1668	●	●
54384	Matte Litho FSC®	C4500	40#	EXACT™/5000	●	●
18444	Matte Litho FSC®	R5195	40#SCK	EXACT™2500	●	●
03558	Matte Litho FSC®	S246	40#SCK	EXACT™/5000	●	●
53352	MaxFlex™ Bright Silver	AT20	40#SCK	EXACT™/5000,10000	●	●
53356	MaxFlex™ Bright Silver	C2075	40#SCK	EXACT™/10000	●	●
54394	MaxFlex™ Bright Silver	C4500	40#	EXACT™/5000,10000	●	●
<b>Prime Film</b>						
78998	2 Mil Clear BOPP TC	S7000	1.2 Mil PET	EXACT™/5000,10000	●	●
79098	2 Mil Clear BOPP TC	S7000	40#BG	EXACT™/5000,10000	●	●
78889	2 Mil Metallized BOPP TC	S7000	1.2 Mil PET	EXACT™/5000,10000	●	●
79101	2 Mil Metallized BOPP TC	S7000	40#BG	EXACT™/10000	●	●
79100	2 Mil White BOPP TC	S7000	40#BG	EXACT™/5000,10000	●	●
78997	2 Mil White BOPP TC	S7000	1.2 Mil PET	EXACT™/10000	●**	●**
78330	2.3 Mil White BOPP TC	S692N	1.2 Mil PET	EXACT™/10000	●**	●**
78333	2.3 Mil White BOPP TC	S692N	40#BG	EXACT™/5000,10000	●**	●**
79536	2.4 Mil White BOPP ITC	S7000	40#BG	EXACT™/5000,10000	●	●
76912	2.6 Mil White BOPP	S692N	40#BG	EXACT™/5000	●	●
78098	3.0 Mil White MDO	S692N	40#BG	EXACT™/5000,10000	●	●
<b>Wine Papers</b>						
19648	Classic Crest Solar White WS FSC	AT20	1.2 Mil PET	EXACT™/5000,10000	●	●
19657	Classic Crest Solar White WS FSC	S100R	1.2 Mil PET	EXACT™/5000	●	●
12623	Classic Crest Solar White WS FSC	S100R	44#PK	EXACT™/5000	-	-
19639	Estate Label No. 4 WS FSC	S100R	1.2 Mil PET	EXACT™/5000	●	●
01533	Estate Label No. 4 WS FSC	S100R	44#PK	EXACT™/5000	●	●
54142	Estate Label No. 4 WS FSC	Z1010	1.2 Mil PET	Custom 60/4167	●	●
19650	Estate Label No. 8 WS FSC	AT20N	1.2 Mil PET	EXACT™/5000,10000	●	●
19656	Estate Label No. 8 WS FSC	S100R	1.2 Mil PET	EXACT™/5000,10000	●	●
54141	Estate Label No. 8 WS FSC	Z1010	1.2 Mil PET	EXACT™/5000,10000	●	●
53381	56# MaxFlex™ Bright Silver	AT20	1.2 Mil PET	EXACT™/10000	●	●
53351	56# MaxFlex™ Bright Silver	S100R	44#PK	EXACT™/5000	●	●

Spec#	Facestock	Adhesive	Liner	Width/Length (In/Ft.)	UV68 Ink	UV90 Ink
<b>Rapid Roll</b>						
75723	1079 Tyvek	NA	NA	EXACT/10500 Stock 48/1668	●	●
75724	1085D Tyvek	NA	NA	EXACT/5000 Stock 48/1668	●	●
78939	6 Mil White Static Cling TC	NA	60#KK	Stock 54/1668	●	●
77038	7Mil Polyart	NA	NA	Stock 60/1668	●	●
16801	8 Mil C1S Smudgeproof Kimdura	NA	NA	Stock 52/1668	●	●
<b>Durables</b>						
77923	2 Mil Bright Chrome Polyester TC	S8025	50#SCK	EXACT™/5000	-	●
77921	2 Mil Clear PET TC	S8025	50#SCK	EXACT™/5000	●	●
78387	2 Mil Matte Chrome Polyester TC	S8001	50#SCK	EXACT™/5000	●	●
77922	2 Mil Matte Chrome Polyester TC	S8025	50#SCK	EXACT™/5000	●	●
79534	2 Mil Matte Chrome Polyester TC	S8049	50#SCK	Custom 54/1000	●	●
78385	2 Mil White Polyester TC	S8001	50#SCK	EXACT™/5000	●	●
77920	2 Mil White Polyester TC	S8025	50#SCK	EXACT™/5000	●	●
79453	2 Mil White Polyester TC	S8049	50#SCK	EXACT™/2500	●	●
78981	2 Mil White Polyester TCD	S8025	50#SCK	EXACT™/5000	●	●**
72828	2 Mil White PRT PET	S333	50#SCK	EXACT™/5000	●	●
78403	2.3 Mil White BOPP TC	S8001	50#SCK	EXACT™/5000	●	●
78401	3 Mil Synthetic Paper	S8001	50#SCK	EXACT™/5000,10000	●	●
79648	4 Mil White Vinyl TCD	S8025	50#SCK	Stock 54/1668	●	●**

- Recommended: Substrate meets Avery Dennison proprietary print testing standards. To earn our recommendation, a specification must demonstrate good print quality, readability and durability. In addition, Durables specs must pass a modified version of cross hatch test ASTM D3359.
- Application Specific: May require further customer-specific testing in order to confirm appropriateness for an application.
- Not Recommended: Indicates one or more of the characteristics failed the graded characteristics within the Avery Dennison test standards.

NOTE: As label graphics and performance requirements vary, we encourage end application testing of all materials prior to use. This statement does not constitute a warranty.

See the EXACT Card for current EXACT and Ready Width service program.

UL 969 w/ UV90 Inks: UL recognized with Domino UV90 inks. UL recognition with an ink system allows label adoption into an existing UL file. Refer to the Avery Dennison UL-Recognized Components Guide for specific details regarding conditions of acceptability.

Key:  
 I/O: Passes "Indoors/Outdoors" without addition of overlamine.  
 I/O w/ OL: Passes "Indoors/Outdoors" with addition of Avery Dennison overlamine.  
 e.g. Spec# 77844: 1 Mil Clear Print Treated PET/S8020/40#BG.  
 Indoors: Only tested for Indoors. Passes "Indoors" without addition of overlamine. Not recommended for "Outdoor" applications.

[label.averydennison.com](http://label.averydennison.com)

A389894 07/2022

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison products are sold subject to Avery Dennison's general terms and conditions of sale found at [label.averydennison.com/en/home/terms-and-conditions.html](http://label.averydennison.com/en/home/terms-and-conditions.html).

